

How To Change Regulator Knob Into Tamper Evident Cap

Instructions are as follows



Fig: Image 1

1. Make sure your Regulator is safely depressurized before starting..as shown in (Image 1)
2. Hold the cap firmly and rotate the adjustment knob anti-clockwise..as shown in (Image 2)



Fig: Image 2



Fig: Image 3

3. After rotating the adjustment knob to anti-clockwise remove the adjustment Knob..as shown in (Image 3)



5. Insert the screw sharp side down into the regulator where the knob was removed..as shown in (Image 5)

Fig: Image 5

6. Use an Allen key clock wise to turn the screw and adjust the pressure as needed..as shown in (Image 6)



Fig: Image 6



7. After setting the pressure, place the tamper-evident cap securely over the screw..as shown in (Image 7)

Fig: Image 7

Note: Once this has been set and if someone wants to change the pressure of the regulator, they have to break the tamper evident cap..as shown in (Image 8)

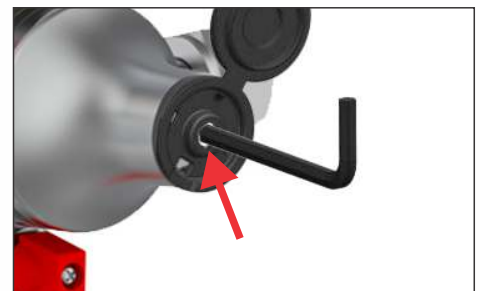


Fig: Image 8